
Patch Cord
SC/UPC - SC/UPC

Structure:



Applications:

- Made with single-mode fiber (SM) 9/125 µm or multimode fiber (MM) 50/125, 62.5/125 µm
- Ideal for making connections between communications cquipment, ODFs
- Jacket made of PVC
- 900 µm jacket diameter
- G.657.A2 standar

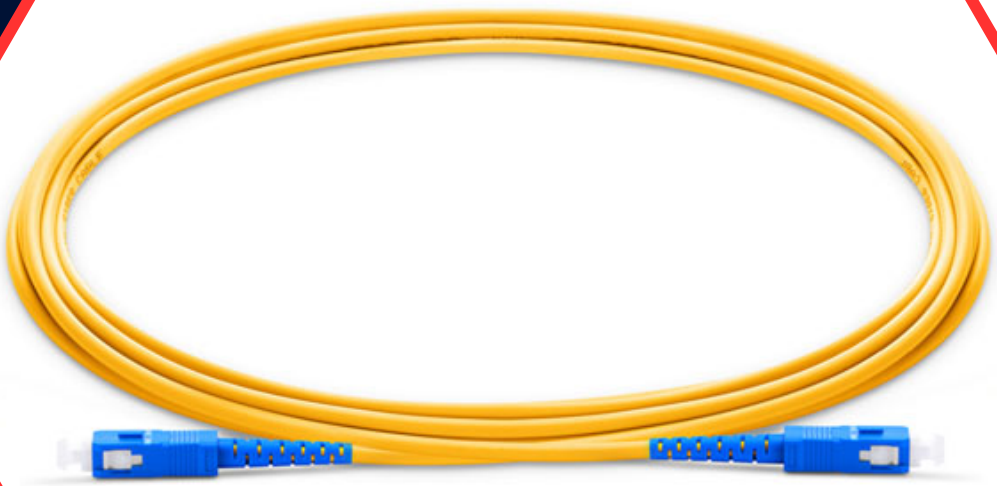

www.fibersystems.com.ve

Specifications

1. Features

Item	Parameter			
OD (Outside Diameter) of cable	Φ 0.9 / Φ2.0 / Φ3.0 / Φ3.6 / 2*3mm			
Cable Type	PVC / LSZH / OFNP			
Fiber Type	9/125um / 50/125 / 62.5/125			
Connector Type	LC/ SC / FC / ST			
Ceramic Ferrule	PC (SM)	UPC (SM)	APC (SM)	PC (MM)
Insertion Loss(dB)	< 0.20	< 0.20	< 0.20	< 0.30
Repeatability(dB)	< 0.10			
Changeability(dB)	< 0.20		< 0.30	
Return Loss(dB)	> 45	> 50	> 60	> 40