

Pigtail LC/APC

Structure:

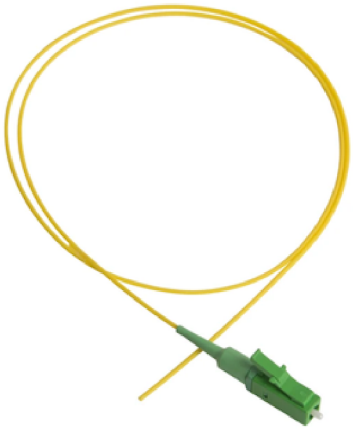

Applications:

- Single-mode (SM) Fiber Optic Pigtail
- Low insertion loss, high return loss
- Internal diameter of 9/125 µm
- Jacket made of PVC
- 900 µm jacket diameter
- G.657.A2 standar

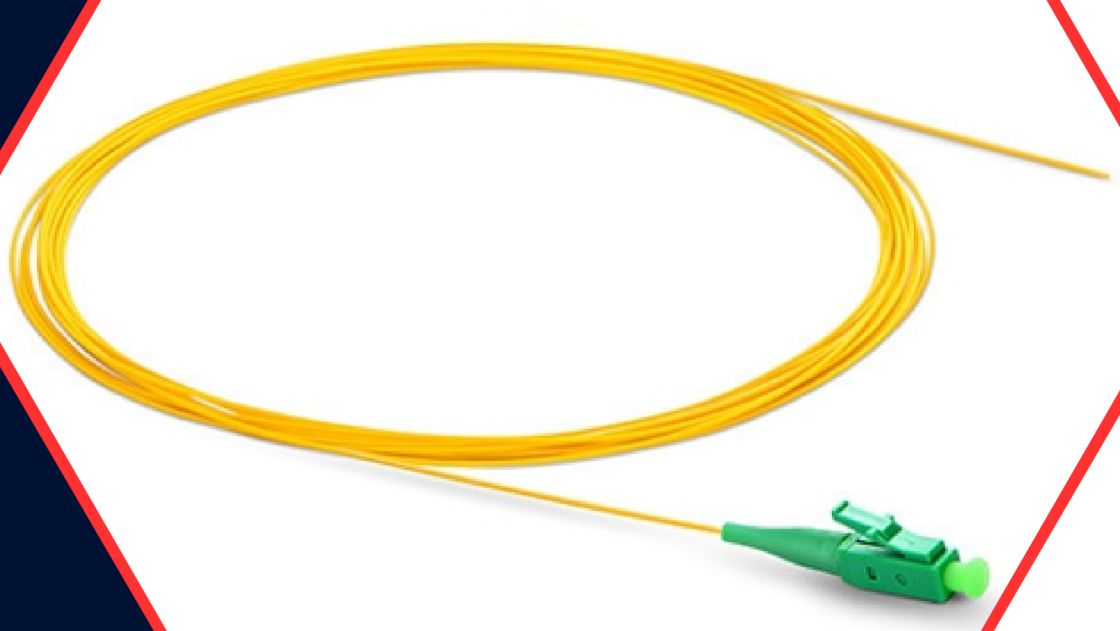

www.fibersystems.com.ve

Specifications

1. Features

Connector A	SC/LC/FC	**Connector B**	Unterminated
Fiber Mode	9/125μm	**Fiber Type**	Simplex
Polish	APC/UPC	**Cable Diameter**	0.9mm
Jacket Material	PVC	**Jacket Color**	Yellow
Wavelength	1310nm / 1550nm	**Durability**	>1000 Time
Insertion Loss	≤0.3dB	**Interchangeability**	≤0.2dB
Return Loss	≥60dB	**Vibration**	≤0.2dB