
Splitter PLC 1x16 - with connector

Structure:



Applications:

- Fiber to The Home (FTTH)
- Passive Optical Networks (PON)
- Gigabit Passive Optical Networks (GPON)
- Local Area Networks (LAN)
- Cable Television (CATV)
- G.657-A.standar

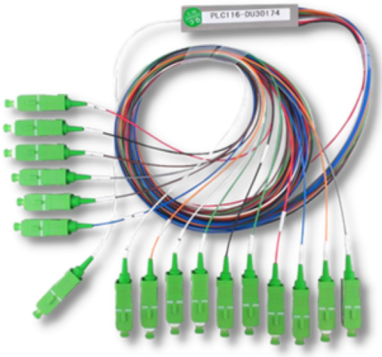

www.fibersystems.com.ve

Specifications

1. Features

Item	1x2	1x4	1x8	1x16	1x32	1x64	1x128
Fiber Type	G.657.A						
Working Wavelength	1260nm~1650nm						
Standard Insertion Loss(dB)	≤4.0	≤7.6	≤10.7	≤14.0	≤17.2	≤20.8	≤24.0
P-Grade InsertionLoss(dB)	≤4.0	≤7.4	≤10.5	≤1.8	≤17.0	≤20.4	≤23.7
Uniformity	≤0.6	≤0.8	≤0.8	≤0.1	≤1.5	≤2.0	≤2.0
PDL (dB)	≤0.2	≤0.2	≤0.3	≤0.3	≤0.3	≤0.4	≤0.5
Wavelength Dependent Loss (dB)	≤0.6	≤0.8	≤0.8	≤1.0	≤1.5	≤2.0	≤2.0
Return Loss (dB)	≥50						
Directivity (dB)	≥55						
Operating Temp.Gange	-40℃~ +8						